
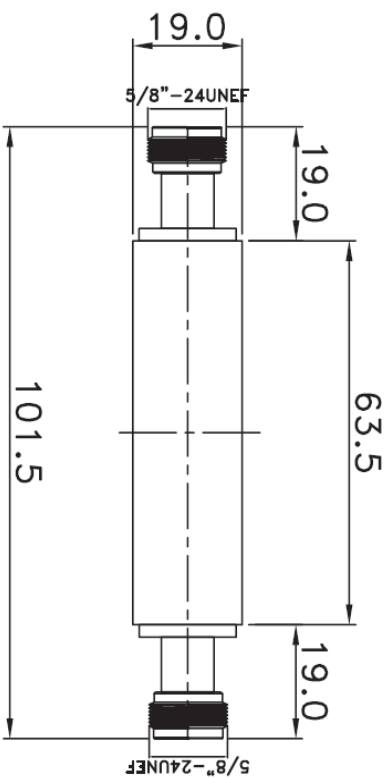


REV	DESCRIPTION	DRAWN	DATE

5000-6000MHZ 1 TO 2 WAYS SPLITTER FOR N FEMALE

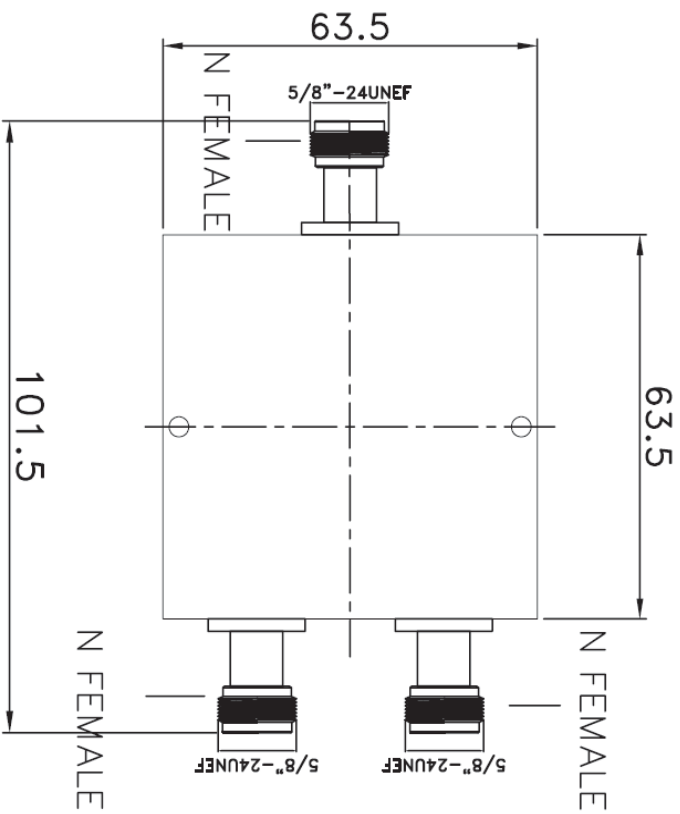

7	Power (W) : ≥ 30
6	Port Connectors : N FEMALE
5	Isolation (dB) : ≥ 22
4	Phase Balance : 5°
3	Amplitude Balance (dB) : ≤ 0.2
2	Insertion Loss (dB) : ≤ 3.8
1	Frequency Range (MHz) : 5000-6000 MHz
NO	Description

UNLESS OTHERWISE SPECIFIED
 1. REMOVE ALL BURRS.
 2. BREAK ALL CORNERS & EDGES CO.15 MAX.
 3. CHAMFER 1ST & LAST THREADS 45°.
 4. DIAMETERS ON COMMON CENTERS.
 5. ALL DIMENSIONS ARE WITHIN DIMENSIONS ARE AFTER PLATING.

* MAJOR DIMENSION
 UNLESS OTHERWISE NOTED TOLERANCES
 0.5-6 = ± 0.2
 6-30 = ± 0.4
 30-120 = ± 0.6
 120-315 = ± 1.0
 ANGLES = $\pm 1'$

APPROVED	CHECKED	DRAWN
		andrew

TITLE	DRAWING NO.	REV
5000-6000MHz 1 TO 2 WAYS SPLITTER FOR N FEMALE	SP-58-01	A

SCALE 5/1 UNIT MM DRAWN DATE 03/07/04 FILE NO.