

Wireless Instruments sp. z o.o.

Iwiny ul. Polna 1, 52-116 Wrocław, Poland Tel1: +48 601 366 369, +48 71 346 50 60 http://www.wireless-instruments.com



WIBOX PA M6-24HV

Installation space:

WiBOX PA M6-24HV is an innovative PTFE microstrip dual polarity (MIMO 2x2) planar antenna operating at the frequency range of 5,6 – 6,5 GHz with 24 dBi gain in both polarizations. The PCB of antenna is made from PTFE which is much more efficient and resistant than standard FR4 laminate. It is desired for Point-to-Point connections, bridge connections and Point-to-Multipoint connections as a client antenna where the high-gained antennas are required. The reduced side-lobes level makes a gain more focused into the front direction than the standard antennas. The antenna is integrated with the top quality **WiBOX Large** box system (the installation space is 38 x 38cm x 5 cm). The box has IP67 waterproof level, there is enough room to install almost every of the most popular radio equipment. **WiBOX Large** provides with the possibility to integrate the antenna system with other systems, using the additional connector holes located at the bottom of the **WiBOX**. The waterproof RJ45 connector allows for the PoE standard utilization without a stressful crimping of the RJ45 connector on the installation location (e.g. on the roof or a high mast). The collar around the connectors guarantees the connectors won't get wet. The **WiBOX Large** is made from the durable plastic material resistant against the UV radiation and bad weather conditions. The special reinforced **WiMount bracket**, made from fiberglass ensures the stability even in case of the strong wind. It comes with 2 x SMA connector.

Click **HERE** to get know how to install the most efficient p2p link













Specification


Frequency	5600 - 6500MHz
Gain	Port 1: 23.5dBi +/-0.5dB; Port 2: 25dBi +/-0.5dBi
Polarization	H&V
Beamwidth Horizontal	8°
Beamwidth Vertical	8°
Front to back	>30dB
Port to port isolation	>41 dB
VSWR	< 1.5, max = 1.8
Impedacja	50 Ω
Connector	RJ-45 & 2 x SMA
Mast Mounting System 0	60 (2,76") mm (inch)
Waterproof Outdoor BOX	IP 67
Operating Temperature	-40 + 70 °C
Weight	2,9 kg
Dimensions	400x400x110 (15,75"x15,75"x4,33")
Warranty	36

Features

- 2 x 24 dBi Directional Gain
- Outdoor Waterproof WiBOX Large
- Big and convenient **WiBOX Large** for radio equipment installation
- RJ45 waterproof system
- Adjustable tilt pole mount WiMount
- Horizontal & Vertical Polarization dual polarity, 2x2 MIMO
- High Quality Construction
- 2 x SMA connector
- DC Grounded for lighting protection
- WiMount Heavy-Duty Mounting Elements
- 3 Years Warranty
- Designed for All Weather Operation

Applications

- 6 GHz Band Wireless LAN
- IEEE 802.11a WLAN Systems
- Point to Point Applications
- Client antennas
- System Integration
- Nstreme protocol
- 802.11a/n MIMO standard

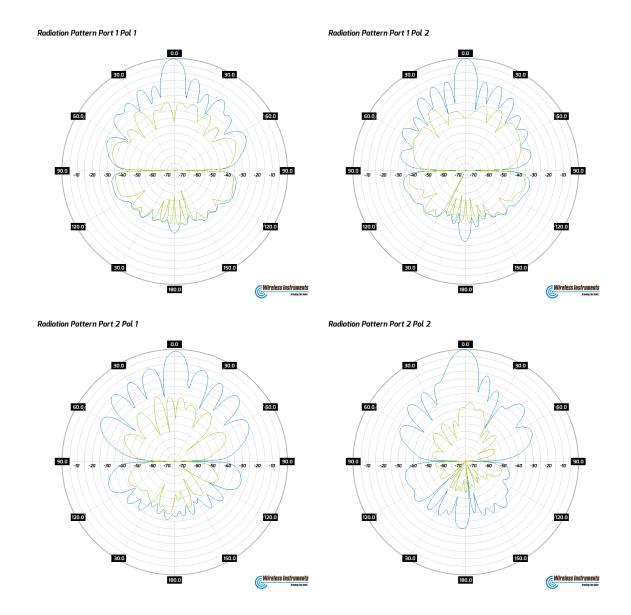

www.wireless-instruments.com