


Artikelnr.: 399869

## UACC-CWDM-8 - CWDM Mux Demux 8

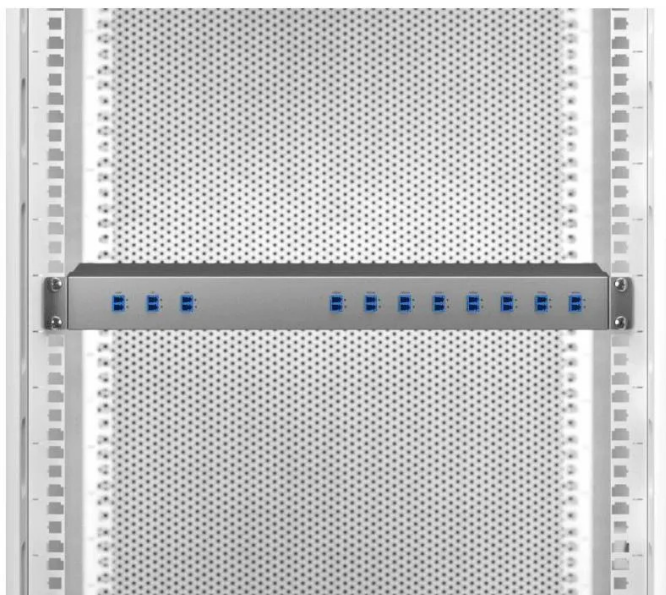

ab **346,10 EUR**

Artikelnr.: 399869  
Versandgewicht: 1.50 kg  
Hersteller: Ubiquiti

### Produktbeschreibung

Rack-mountable 8-channel 1450 to 1590 nm CWDM mux demux designed to increase capacity of existing fiber infrastructure. (8) 1450 to 1590 nm channel ports (1) Duplex LC UPC communication port for linking to another CWDM Mux Demux 8 with a pair of single-mode fiber cables (1) Duplex LC UPC monitor port for seamless observation with a power meter or optical spectrum analyzer (1) Duplex LC UPC expansion port for linking to CWDM Mux Demux 4 to add more channels Mechanical- Dimensions: 442 x 120 x 43.7 mm ( 17.4 x 4.7 x 1.7")- Weight: 1.4 kg (3.2 lb)- Enclosure material: Metal Hardware Connector type- (1) COM (LC/UPC)- (1) MON (LC/UPC)- (1) EXP (LC/UPC)- (1) 1450 to 1590 nm (LC/UPC) Pigtail and connector type- COM: 0.9 mm black LC/UPC- Other ports: 0.9 mm white LC/UPC- Fiber type: SMF-28e- Fiber length: ?0.5 to 1 m- Channel count\_ 8 CH Mux/Demux- Channel center wavelength: 1450/1470/1490/1510/1530/1550/1570/1590 nm- Min. channel passband:  $\pm 6.5$  nm- Max. insertion loss: <2.5 dB Isolation- adjacent channel: Max. 30 dB- Non-Adjacent channel: Min. 40 dB- Max. passband ripple: 0.3 dB- Max. Polarization Dependent Loss: 0.1 dB- Min. directivity: 55 dB- Min. return loss: 50 dB- Max. polarization mode dispersion: 0.1 ps- Max. power handling: 500 mW- Storage temperature: -40 to 90° C (-40 to 194° F)- Ambient operating temperature: -30 to 75° C (-22 to 167° F)

### Technische Daten

**Hier gehts zum Artikel**  
Alle Informationen,  
tagesaktuelle Preise und  
Verfügbarkeiten

