



**MATERIAL**

Housing: High-impact Acrylonitrile Butadiene Styrene (ABS resin), UL 94 V-0 rated  
 PCB: FR4, t=1.6mm (0.063 in)

**USB Connector:**

Shell: Copper Alloy, plated with Nickel  
 Plastic: High-impact Polybutylene terephthalate (PBT resin), UL 94 V-0 rated, Glass Filled  
 Contact: Copper Alloy, plated with thin hard gold  
 0.76 μm (30 μin)

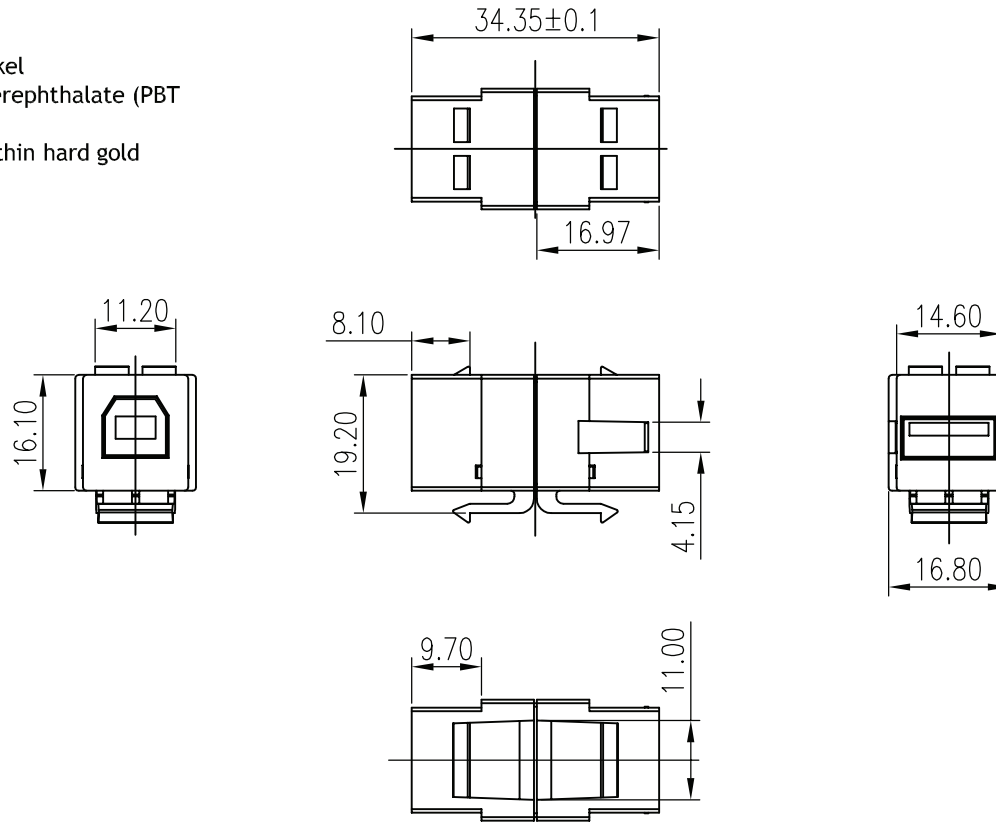

TOLERANCE		SCALE	SHEET	DRAWN BY	DATE	TITLE	
.X	±0.20	1:1	1/1	Tom	2012/09/12		
.XX	±0.10	A		CHECKED BY	DATE	USB 2.0 A-B keystone type module	
ANGLES	±2°	MATERIAL	THIRD ANGLE PROJECTION	Peter	2012/09/12		
				PART NO.		DWG. NO.	
				86320			

