
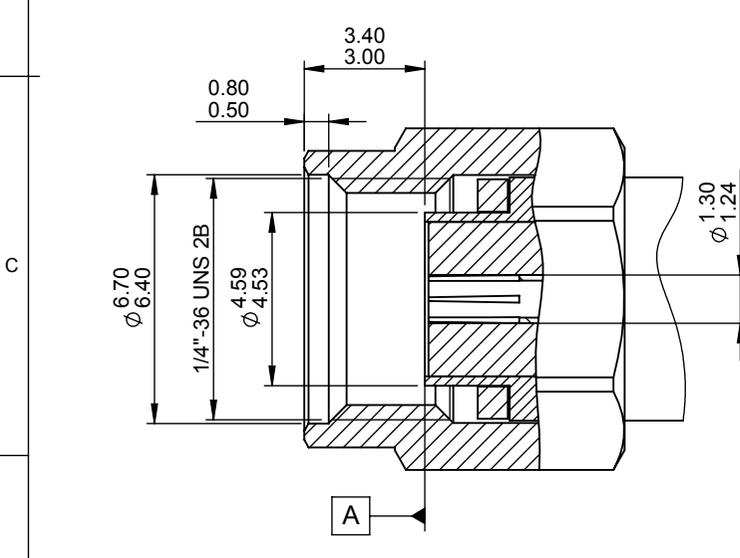



TOLERANCES UNLESS OTHERWISE STATED			
0 DEC. PLACE	±0.5	2 DEC. PLACES	±0.1
1 DEC. PLACE	±0.2	ANGULAR	±1°

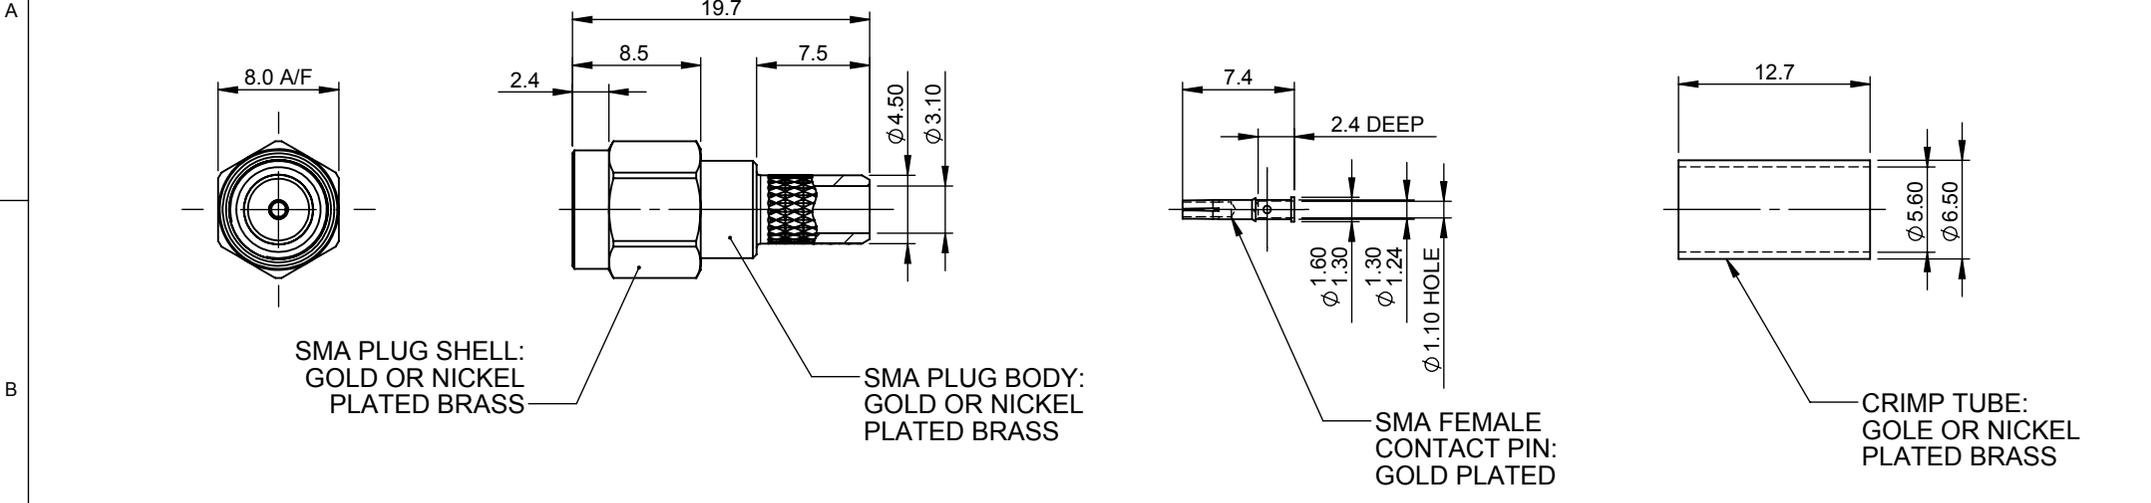

NOTES: 3

1. CONTACT PIN MUST REMAIN CAPTIVE AFTER ASSEMBLY OF CONNECTOR.
2. FINAL CONNECTOR ASSEMBLY MUST CONFORM TO STANDARD INTERFACE DIMENSIONS SHOWN.
3. SAMPLES MUST BE APPROVED BY PANORAMA ANTENNAS Q.C. BEFORE COMMENCING PRODUCTION.
4. ALL THREADS TO BE FREE FROM RESTRICTION ALONG ENTIRE LENGTH AFTER PLATING.
5. ALL DIMENSIONS APPLY AFTER PLATING.
6. ALL MATERIALS USED MUST BE RoHS COMPLIANT.

ISO VIEW SCALE 1:1



01019	3	REDRAWN IN 2D AND 3D. NOTES UPDATED.	21/11/2012	PE
PCN	REV.	DESCRIPTION OF CHANGE	DATE	DRAWN
REVISIONS				

PRODUCT/ASSEMBLY CONNECTORS		DESCRIPTION SMA STRAIGHT CRIMP PLUG REVERSE POLARITY FOR RG58 COAX CABLE		
MATERIAL SEE DRAWING		APPROVED KD	DO.CHECK KD	SCALE 2:1
FINISH SEE DRAWING				
WEIGHT 0.52 g	SHEET 1 OF 1			