



OPNsense[®] Rack Security Appliance DEC3800 Series



specifications of DEC3860


17 Gbps
FIREWALL


2.5 Gbps
IPsec VPN


512 GB
Storage


32 GB
DDR4 RAM

AMD EPYC™ Performance.

Rack mountable appliance, the full package at an affordable price.
Exceptional performance for businesses & enterprises.



17Gbps Throughput
1.5 Mega Packets per Second



Guard Web Access
Filtering (SSL) Proxy
Captive Portal with Voucher support



~2Gbps Inline Intrusion Prevention



512GB SSD
Offering Sufficient Space for Logging & Reporting



Fast Filtering
Up to 50.000 Connections per Second




System wide two-factor authentication.
Compatible with Google Authenticator.



Hardware Assisted Encryption
2.5Gbps IPsec (AES256GCM16)

Securing Networks™

DEC3800 SERIES




Bundled with a free year OPNsense[®] Business Edition

- ✓ Commercial firmware repository
- ✓ Free GeoIP database
- ✓ Official OPNsense Open Virtualization Image
- ✓ Free professional plugins (OPNcentral, Proxy Access)
- ✓ Free E-Book (English & German)



Securing Networks[™]

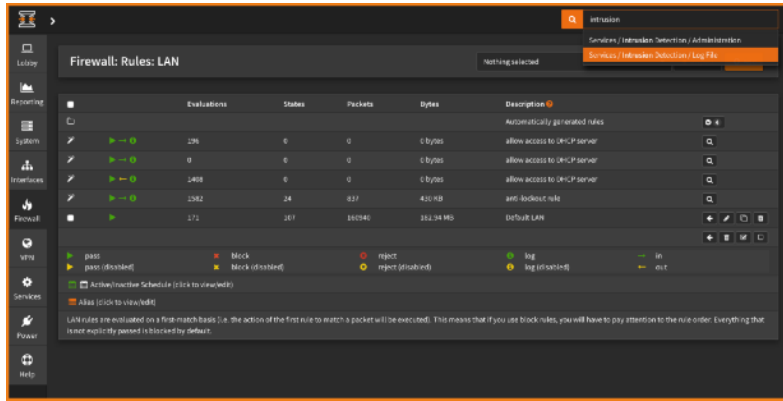

OPNsense[®] Secure Your Network With Ease[™]

OPNsense is Deciso's fast growing open source firewall and security platform released under an Open Source Initiative approved license. Its rich feature set is combined with the benefits of open and verifiable sources.

All features can be used from within the easy to use graphical interface, equipped with a build-in search feature for quick navigation. Protecting your network has never been this easy with features such as; the integrated intrusion prevention system and two-factor authentication for safely connecting mobile users.



Businesses

Protect your business network and secure your connections. From the stateful inspection firewall to the inline intrusion detection & prevention system everything is included for free. Use the traffic shaper to enhance network performance.



Schools

Limit and share available bandwidth evenly amongst students and utilize the category based web filtering to filter unwanted traffic such as adult content and malicious websites. It is easy to setup as no additional plugins nor packages are required.



Hotels

OPNsense offers a captive portal to control guest internet access for a limited duration. Vouchers can easily be created via the graphical user interface.



On the road

Even on the road OPNsense is a great asset to your business as it offers OpenVPN and IPSec VPN solution with road warrior support and two-factor authentication. The easy client exporter make configuring your OpenVPN SSL client setup a breeze.



Remote Offices / Branches & SOHO

The integrated site to site VPN (IPsec or SSL VPN) can be used to create a secure network connection to and from your remote offices. Enjoy the easy configuration and online searchable documentation with simple how-to type of articles to get you started, quickly. Pluggable support is offered for ZeroTier, Tinc as well as Wireguard.

Stateful firewall

- Filter by
 - Source
 - Destination
 - Protocol
 - Port
 - OS (OSFP)
- Limit simultaneous connections on a per rule base
- Log matching traffic on a per rule bases
- Policy Based Routing
- Packet Normalisation
- Option to disable filter for pure router mode

Policy organization

- Alias Support
 - IP addresses
 - Port ranges
 - Domain names (FQDN)
- Interface Groups
 - Create security zones with equal rules
- Rule Category
 - Easy access rule sets

Granular control state table

- Adjustable state table size
- On a per rule bases
 - Limit simultaneous client connection
 - Limit states per host
 - Limit new connections per second
 - Define state timeout
 - Define state type
- State types
 - Keep
 - Sloppy
 - Modulate
 - Synproxy
 - None
- Optimisation options
 - Normal
 - High latency
 - Aggressive
 - Conservative

Authentication

- External Servers
 - LDAP
 - Radius
- Integrated Servers
 - Local User Manager
 - Vouchers / Tickets
 - FreeRadius (Plugin)

Authorization

- User Interface
 - Local User Manager

Accounting

- FreeRadius (Plugin & External)
- Vouchers / Tickets

2-Factor Authentication

- Supports TOTP
- Google Authenticator
- Supported services:
 - Captive Portal
 - Proxy
 - VPN

- GUI
- SSH / Console

Certificates

- Certificate Authority
 - Create or Import CA's
 - Create or Import Certificates
- Let's Encrypt (Plugin)
 - Automated (Trusted) CA

802.1Q VLAN support

- max 4096 VLAN's

Link Aggregation & Failover

- Failover
- Load Balance
- Round Robin
- Cisco Ether Channel (FEC)
- 802.3ad LACP

Other Interface types

- Bridged interfaces
- Generic Tunnel Interface (GIF)
- Generic Routing Encapsulation

Network Address Translation

- Port forwarding
- 1:1 of ip's & subnets
- Outbound NAT
- NAT Reflection

Traffic Shaping

- Limit bandwidth
- Share bandwidth
- Prioritize traffic
- Rule based matching
 - Protocol
 - Source
 - Destination
 - Port
 - Direction

IGMP Proxy

- For multicast routing

Universal Plug & Play

- Fully supported

Dynamic DNS

- Selectable form a list
- Custom
- RFC 2136 support

DNS Forwarder

- Host Overrides
- Domain Overrides

DNS Server

- Host Overrides
 - A records
 - MX records

- Access Lists

DNS Filter

- Supports OpenDNS

DHCP Server

- IPv4 & IPv6
- Relay Support
- BOOTP options

Multi WAN

- Load balancing
- Failover
- Aliases

Load Balancer

- Balance incoming traffic over multiple servers

Network Time Server

- Hardware devices
 - GPS
 - Pulse Per Second

Intrusion Detection & Prevention

- Inline Prevention

- Integrated rulesets
 - SSL Blacklists
 - Feodo Tracker
 - Emerging Threats ETOpen
- SSL Fingerprinting
- Auto rule update using configurable cron

Captive Portal

- Typical Applications
 - Guest Network
 - Bring Your Own Device (BYOD)
 - Hotel & Camping Wifi Access
 - Template Management
 - Multiple Zones

Authenticators

- All available authenticators
- None (Splash Screen Only)

Voucher Manager

- Multiple Voucher Databases
- Export vouchers to CSV

Timeouts & Welcome Back
Bandwidth Management

- Use Traffic Shaper

Portal bypass

- MAC and IP whitelisting

Real Time Reporting

- Live top IP bandwidth usage
- Active Sessions
- Time left
- Rest API

Virtual Private Networks

- IPsec
 - Site to Site
 - Road Warrior
- WireGuard (Plugin)
 - Site to Site
 - Road Warrior
- OpenVPN
 - Site to Site
 - Road Warrior
 - Easy client configuration exporter

Tinc (Plugin)

- Full mesh routing

ZeroTier (Plugin)

- VPN, SDN & SD-WAN

High Availability

- Automatic hardware failover
- Synchronized state table
- Configuration synchronisation

Caching Proxy

- Multi interface
- Transparent Mode
- Support SSL Bump
- SSL Domain only (easy filtering)
- Access Control Lists
- Blacklists
- Category Based Web-filter
- Traffic Management
- Auto sync for remote blacklists
- ICAP (supports virus scan engine)

Virus scanning (via plugins)

- External engine support (ICAP)
- ClamAV (Plugin / C-ICAP)

Reverse Proxy

- HAProxy - Load balancer (Plugin)

Online Identity Protection

- Tor - Anonymity online (Plugin)

Backup & Restore

- History & Diff support

- File Backup
- Cloud Backup
- Git Backup

SNMP

- Monitor & Traps

Diagnostics

- Filter reload status
- Firewall Info (pfInfo)
- Top Users (pfTop)
- Firewall Tables
 - Aliases
 - Bogons
- Current Open Sockets
- Show All States
- State Reset
- State Summary
- Wake on LAN
- ARP Table
- DNS Lookup
- NDP Table
- Ping
- Packet Capture
- Test Port
- Trace route

Monitoring

- Zabbix Agent (Plugin)
- Monit (Plugin)
 - Proactive System Monitoring

Enhanced Reporting

- Network Flow Analyzer 'Insight'
 - Fully Integrated
 - Detailed Aggregation
 - Graphical Representation
 - Clickable and Searchable
 - CVS Exporter

System Health

- Round Robin Data
- Selection & Zoom
- Exportable

Traffic Graph

- Live Traffic Monitoring

Network Monitoring

- Netflow Exporter
 - Version 5 & version 9
 - Local for 'Insight'

Firmware


- Support Virtual Installs
 - VMware tools (Plugin)
 - Xen Guest Utilities (Plugin)
- Easy Upgrade
 - Reboot warning for base upgrades
- SSL Flavour selectable
 - OpenSSL
 - LibreSSL
- Selectable Package Mirror
- Reinstall Single Package
- Lock Package (prevents upgrade)
- Audit Feature
 - Check installed packages for known security vulnerabilities
- Plugin Support

REST API

- ACL support

Online Documentation

- Free & Searchable

	DEC3840	DEC3850	DEC3860
			
Software			
Preinstalled software	OPNsense®	OPNsense®	OPNsense®
License	Open Source + 1 year free Business Edition	Open Source + 1 year free Business Edition	Open Source + 1 year free Business Edition
Hardware Specifications			
SFP+ Ports [10Gbps]	2	2	2
GbE RJ45 Ports [10/100/1000Mbps]	4	4	4
USB 3.0 Ports	2	2	2
Console Port	1	1	1
Internal Storage	256GB M.2. Solid State Flash	256GB M.2. Solid State Flash	512GB M.2. Solid State Flash
Memory	8GB DDR4	16GB DDR4	32GB DDR4
CPU Cores	4 (max frequency 2.9Ghz)	8 (max frequency 3.1Ghz)	8 (max frequency 3.1Ghz)
Virtual Interfaces (802.1q VLANs) ¹	4093	4093	4093
System Performance			
Firewall Throughput	14.6Gbps	17.6Gbps	17.6Gbps
Firewall Packets Per Second	1200Kpps	1450Kpps	1450Kpps
Firewall Port to Port Throughput	14.6Gbps	17.6Gbps	17.6Gbps
Firewall Port to Port Packets Per Second	122000	1450Kpps	1450Kpps
Concurrent Sessions	7000000	15000000	31000000
New Connections Per Second	50000	50000	50000
Firewall Latency (average)	100us	100us	100us
Firewall Policies (Recommended Maximum) ¹	10000	10000	10000
IPsec VPN Throughput (AES256GCM16)	2.3Gbps	2.5Gbps	2.5Gbps
IPsec VPN Packet Per Second (AES256GCM16)	200Kpps	220Kpps	220Kpps
Threat Protection Throughput Packet Per Second	163Kpps	163Kpps	163Kpps
Threat Protection Throughput	~2Gbps	~2Gbps	~2Gbps
High Availability with State Synchronisation	Requires Two	Requires Two	Requires Two
Dimensions			
Height x Width x Depth (mm)	44.5 (1U) x 482.6 (19") x 280 (254	44.5 (1U) x 482.6 (19") x 280 (254	44.5 (1U) x 482.6 (19") x 280 (254
Height x Width x Length (inches)	1.75 x 19 x 11 (10 excl. panel)	1.75 x 19 x 11 (10 excl. panel)	1.75 x 19 x 11 (10 excl. panel)
Form Factor	19" Rackmountable	19" Rackmountable	19" Rackmountable
Weight (appliance only)	3.33Kg	3.43 Kg	3.43 Kg
Environment			
Power Requirements	100-240VAC, 50-60Hz	100-240VAC, 50-60Hz	100-240VAC, 50-60Hz
Maximum Current	2.2A	2.2A	2.2A
Power Consumption (Typical)	40W	45W	45W
Heat Dissipation	136.5 BTU/hr	153.6 BTU/hr	153.6 BTU/hr
Operating Temperature	0 to +50°C	0 to +50°C	0 to +50°C
Storage Temperature	-20 to +70°C	-20 to +70°C	-20 to +70°C
Humidity	10-90% non-condensing	10-90% non-condensing	10-90% non-condensing
Regulatory Compliance			
	FCC part 15 Class A, CE, Rohs	FCC part 15 Class A, CE, Rohs	FCC part 15 Class A, CE, Rohs

¹ The user interface is designed for normal business usage, large rulesets, high number of users or interface assignments may be less practical.

Total Firewall Throughput is calculated based on system utilization and actual measured port-to-port performance (if both numbers are the same no measurement of system utilization was recorded and maximum theoretical throughput is likely to be higher). Maximum PPS is measured using IMIX. All throughput numbers are based upon maximum packets per second multiplied by standard 1514byte frame size minus additional overhead where applicable. IPsec traffic is measured using AES256GCM16 via a routed tunnel. Latency is measured as an average over 60 seconds with system at 80% of maximum load and 256byte UDP packages. IPS performance is measured using a EMIX simulation. Concurrent sessions are based upon memory available, where one state consumes 1KB of memory and 1GB of memory is reserved for system tasks.