


Item no.: 312809

## RBA-12-AS5-CAX-A1 - RBA-12-AS5-CAX-A1 - Wall-mounted 19" cabinet, 1-sectioned, 12 HU, 495 mm depth

from **230,88 EUR**

Item no.: 312809  
shipping weight: 22.00 kg  
Manufacturer: Triton

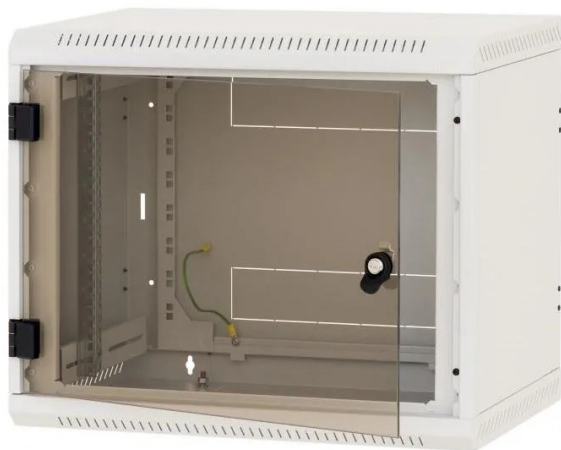

### Product Description

TRITON RBA-12-AS5-CAX-A1 - Wall-mounted 19" cabinet, 1-sectioned, 12 HU, 495 mm depth

The fully welded wall-mounted cabinet is a classic for medium-size installations. It is well-proven by thousands of successful installations. High-quality processing ensures an excellent look and a high utility value.

The cabinet has a robust welded construction. High-quality processing and up-to-date technologies ensure a perfect look of the cabinet.

The cabinet door is glass by default but can be steel or perforated if required. The hinge system enables an almost 180° wide opening of the door. The doors can be easily removed.

#### ADJUSTABLE VERTICAL RAILS:

One pair of vertical 19 rails is freely adjustable in any depth of the cabinet. This simplifies mounting the device and organizing connecting cables.

#### BREAKOUT-TYPE BLANKING PANELS:

Cable openings covered with breakout-type blanking panels are ready in the top, bottom and rear part of the cabinet. Use a plastic frame and a blanking panel with a brush that are part of the cabinet supply to seal the cabinet opening against dust.

#### Size in mm:

- 635 x 600 x 495

#### Description, usage

- 19 one-sectioned wall-mounted cabinet with IP 30 protection
- Cabinet is to be hanged right on the wall
- Cabinet components include two sliding vertical rails
- Cabinet construction:
  - Compact welded cabinet
  - Glass door: safety hardened glass, thickness 5 mm
- Cabinets are intended for installing data and telecommunication devices and their distribution systems
- The frame of the cabinet and all the removable parts are connected with grounding cables that have to be properly fixed and inserted into connectors during all the time when using the cabinet
- There is one M8 screw placed on the bottom part of the cabinet as a main grounding point
- Cable openings covered with breakout-type blanking panels are placed in the top and the bottom part of the cabinet's rear side, others are in the top and the bottom side of cabinet

#### Supply includes:

- Key - front door 2x
- Screw 6x50 4x
- Washer 6,6 4x
- Dowel 10 4x
- Captive nut M6 8x
- Blanking panel with brush 1x

#### Material:

- Safety hardened glass 5 mm thick
- Steel sheet

## Specifications

---

**Scan this QR code to  
view the product**  
All details, up-to-date  
prices and availability

