


Item no.: 327943

EX.1902 - Pigtail SC/APC SM 900UM G.657A 1m

0,98 EUR

Item no.: 327943
shipping weight: 0.50 kg
Manufacturer: Extralink

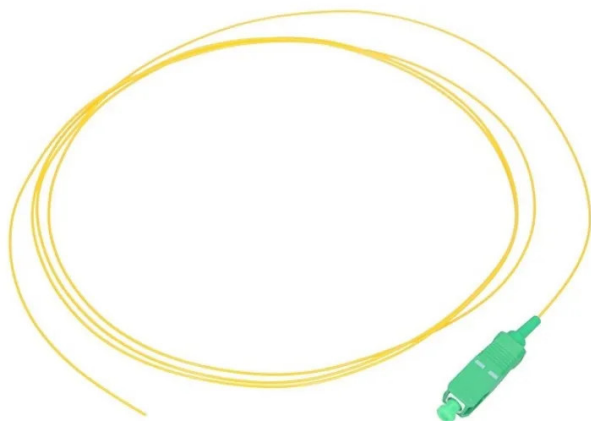

Product Description

Pigtail SC/APC SM 900UM G.657A 1m

Pigtail with SC/APC connector consists of G.657A singlemode fiber, specially developed for FTTx technology. This fiber is characterized by a reduced bending radius without increasing the attenuation. This is a very important feature in the construction of the FTTx network, as there are many changes due to the large number of directional changes of the optical line and small cabinets and distributors. The pigtail is mainly used for the connection of customer cables in customer boxes and in the final distribution element.

- Minimum bending radius 10 mm
- Random attenuation Average IL 0.15 dB
- APC RL Reflectance >60 dB
- Fibre strength >9 N
- Operating temperature -40 ~ +85 °C
- fibre diameter 0,9 mm
- PVC coating
- Insertion loss = 60 DB

Specifications

Scan this QR code to
view the product
All details, up-to-date
prices and availability

