


Item no.: 312213

Pigtail U.FL/IPEX, 250 mm 1.13 mm cable, 30 mm stripped

1,09 EUR

Item no.: 312213
shipping weight: 0.10 kg
Manufacturer: VARIA Group

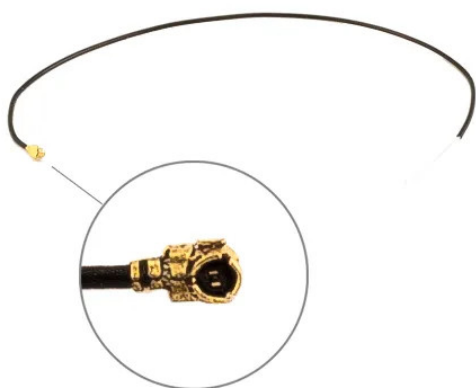

Product Description

Pigtail U.FL/IPEX, 250 mm 1.13 mm cable, 30 mm stripped

The 1.13 mm Coaxial Cable:

1.13 mm cable is the most popular thin RF coaxial cable and is most commonly used with SMA connectors, Hirose U.FL-LP-068, and IPEX 20278-112R-13 for RF signal transmission in cellular communications, GPS and Wi-Fi systems.

- Impedance: 50 Ohm
- Capacitance: 96 pF/M
- Conductor: Silver-coated copper, 32 AWG (7/0.080 mm)
- Shield coverage: 90%
- Minimum bend radius: 4.5 mm
- Connectors: U.FL/IPEX, 30 mm stripped
- Cable length: 250 mm
- Cable type: 1.13 cable

Specifications

Scan this QR code to
view the product
All details, up-to-date
prices and availability

