


Item no.: 344205

## UT850EG - Line-Interactive 850 VA UPS, LED, AVR

from **74,94 EUR**

Item no.: 344205  
shipping weight: 4.70 kg  
Manufacturer: CyberPower

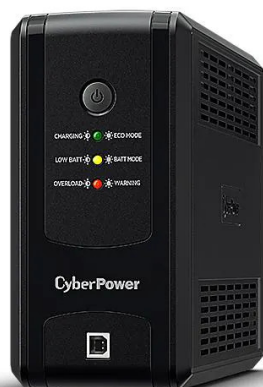

### Product Description

#### UT850EG - Line-Interactive 850 VA UPS, LED, AVR

CyberPower UT850EG guarantees power protection for computers, networking equipment, and storage devices. The product adopts line-interactive topology with Automatic Voltage Regulation (AVR) function to offer stabilized AC power output. The patented GreenPower UPS™ Bypass design achieves ultra-low power consumption to reduce energy costs, and allows a lower operation temperature which extends battery lifespan.

The LED indicator shows the utility, battery and operating status of the UPS. It is also compatible with generators to extend power continuity. Other features include overload protection, EMI filter and configurable alarm to safeguard your devices. Its tower design allows users to place it easily on desks or other tight spaces.

#### General

- Phase: Single-phase
- Form factor: Tower
- UPS topology: Line-interactive
- Energy saving technology: GreenPower UPS™ bypass technology

#### Input

- Generator compatibility: Yes
- Nominal input voltage (Vac):  $230 \pm 10\%$
- Input voltage range (Vac): 165 ~ 290
- Input frequency (Hz):  $50 \pm 5$ ;  $60 \pm 5$
- Input frequency detection: Auto-sensing
- Rated input current (A): 3.69
- Input connector type: Schuko

#### Output

- Capacity (VA): 850
- Capacity (Watts): 425
- On battery waveform: Simulated sine wave
- On battery voltage(s) (Vac):  $230 \pm 10\%$
- On battery frequency (Hz):  $50 \pm 1\%$ ;  $60 \pm 1\%$
- Automatic voltage regulation (AVR): Single boost, single buck
- Overload protection: Internal current limiting, fuse
- Outlet(s), total: 3
- Outlet type: 3x Schuko
- Outlet(s), battery & surge protected: 3
- Typical transfer time (ms): 4

#### Battery

- Runtime at 60 W (min.): 30
- Runtime at 90 W (min.): 20
- Runtime at 200 W (min.): 6
- Typical recharge time (hours): 6
- Start on battery: Yes
- User-replaceable: No
- Battery type: Sealed lead-acid

#### Surge Protection & Filtering

- Surge suppression (Joules): 125
- EMI/RFI filtration: Yes
- Phone/network protection RJ11/RJ45 (combo): 1-in, 1-out

#### Management & Communication

- LED indicators: Power on, line mode, battery mode, bypass mode, low battery, overload, UPS fault
- HID compliant USB port(s): 1
- Audible alarms: Battery mode, low battery, overload, UPS fault
- Ethernet data transmission speed: Up to 1 Gbps
- Power management software: PowerPanel® Personal (recommended)

#### Physical

- Enclosure construction: Plastic
- Color: Black

#### Physical Size - UPS Module

- Dimensions (WxHxD, in.): 3.31 x 6.85 x 11.02
- Dimensions (WxHxD, mm.): 84 x 174 x 208
- Weight (lbs.): 9.26
- Weight (kg.): 4.2

#### Environment

- Operating temperature (°F): 32 ~ 104
- Operating temperature (°C): 0 ~ 40
- Operating relative humidity (non-condensing, %): 0 ~ 90
- Operating elevation (feet/meters): 0-9,843 feet (0-3,000 meters)
- Storage temperature (°F): -4 ~ 122
- Storage temperature (°C): -20 ~ 50
- Storage relative humidity (non-condensing, %): 0 ~ 90
- Storage elevation (feet/meters): 0-9,843 feet (0-3,000 meters)
- Online thermal dissipation (BTU/hr): 34

#### Certifications

- Certifications: CE
- RoHS: Yes

## Specifications

---

**Scan this QR code to  
view the product**  
All details, up-to-date  
prices and availability

