


Item no.: 384794

UA-INTERCOM - Access intercom, indoor/outdoor intercom station

from **321,12 EUR**

Item no.: 384794
 shipping weight: 1.50 kg
 Manufacturer: Ubiquiti

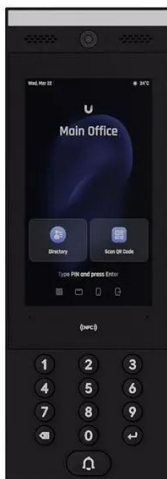

Product Description

Indoor and outdoor intercom terminal for managing access requests for residential and commercial buildings. Details- Unlocking with NFC card, UniFi Identity Mobile App, PIN code or QR code- Directory and doorbell for access request- Coupling with multiple UniFi Intercom Viewers for remote access control- Connection to the UniFi Access Hub series via PoE- Weatherproof (outdoor -30 to 60° C) Mechanical- Dimensions: 324.8 x 113.7 x 28.3 mm (12.8 x 4.5 x 1.1")- Weight: Device: 965 g (2.1 lb)- Mount: 445 g (1 lb)- Housing material: Aluminium alloy, UV-stabilised polycarbonate, glass- Mounting material: Powder-coated stainless steel- Mounting: Wall bracket, adapter for gooseneck base (included)- Surface-mounted angle mounting, flush-mounted (optional)- Sun protection kit (optional)- Weather protection: IP65 Hardware- Network interface: (1) GbE RJ45 connection- Connectivity: Bluetooth 4.2 / NFC- Power supply method: PoE- Supported voltage range: 48V DC- Max. Power consumption: 13W- ESD/EMP protection: Air: ±15kV, Contact: ±8kV- Sensors: Proximity sensor / ALS sensor- Camera 3264 x 2448, 8 MP / H: 79.4°, V: 97.5°, T: 118.2°- Display 177 mm (7") diagonal- Resolution 1024 x 600 (16:9)- Display: Luminance max. 1000 nits (typical)- Touchscreen technology: Capacitive multi-touch- Microphone: Yes- Speaker: (1) 4 Ohm, 2 W- LEDs (1) LCM low temperature indicator: orange (LCM switches off when the temperature is below -25° C, but the system functions normally)- (1) LED floodlight- (13) LED backlight of the keypad- Button (1) factory reset- NFC frequency: 13.56 MHz- NFC read range: < 30 mm- NFC standards: ISO 14443A, 14443B, 15693- NFC technology: NFC Tag 1,2,3,4,5, MIFARE Classic, MIFARE Plus, MIFARE Ultralight, MIFARE DESFire- Operating ambient temperature device: -30 to 60° C (-22 to 140° F)- Display: -25 to 60° C (-13 to 140° F)- Certifications: CE, FCC, IC Software- UniFi Access management application: version 1.22.17 and higher*The display will turn off if the ambient temperature is above/below the operating temperature of the display, but other functions will remain functional. (Valid from firmware version 1.0.66) Operating humidity 5 to 90 % non-condensing

Specifications

Scan this QR code to
 view the product
 All details, up-to-date
 prices and availability

