


Item no.: UA-SK-ELEVATOR

UA-SK-ELEVATOR - UA-SK-ELEVATOR, Starter Kit

from **883,38 EUR**

Item no.: UA-SK-ELEVATOR
 shipping weight: 0.70 kg
 Manufacturer: Ubiquiti

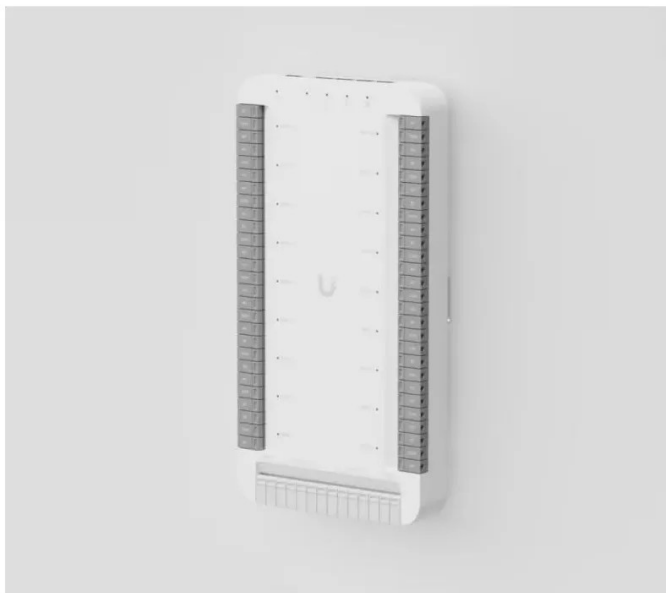

Product Description

Connection to lift reader via PoE to authorise floor selection by the user. Support for up to 18 floors and digital inputs for car status and emergency.

UA-Hub-Elevator Mechanical- Dimensions 129.3 x 244.7 x 33.6 mm (5.1 x 9.6 x 1.3")- Weight 537 g (1.2 lb)- Housing material polycarbonate- Mounting material polycarbonate
 UA-Hub-ElevatorHardware- Network interface (4) 10/100/1000 Base-T- Management interface (1) 10/100/1000 Base-T- Power supply method PoE+- Max. Power consumption 7 W (without PoE output)- PoE input (1) PoE+, 50 V DC, 1.2 A- PoE output PoE passthrough, (4) PoE, 50 V DC, 42 W in total- ESD/EMP protection air: ±8 kV, contact: ±4kV- Digital input (6) car position; up/down/stop/full/door open/door closed; (1) emergency- Outputs (18) relays; rated 30V DC/2A- LEDs system: white/blue/red- Output relays: white- Buttons (1) factory reset; terminal blocks- Operating temperature -10 to 40° C (14 to 104° F)- Operating humidity 5 to 95% non-condensing- Certifications CE, FCC, IC
 UACC-Extender-2Wire-Tx/RxMechanical- Dimensions 40 x 105 x 25 mm (1.6 x 4.1 x 1")- Weight PoE in: 77 g (2.7 oz)- PoE out: 79 g (2.8 oz)- Housing material polycarbonate- Mounting material polycarbonate
 UACC-Extender-2Wire-Tx/RxHardware- Network interface (1) 10/100 MbE; (1) Homeplug AV- Management interface (1) 10/100 MbE- Power supply method PoE+- Max. Power consumption 3W (without PoE output)- PoE input (1) PoE+, 50V DC, Max. 1.2A- PoE output (1) PoE+, 48V DC, 0.72A- ESD/EMP protection air: ±8kV, contact: ±4kV- LED White- Operating temperature -10 to 40° C (14 to 104° F)- Operating humidity 5 to 95% non-condensing- Certifications CE, FCC, IC
 UACC-G2Mechanical- Dimensions 93 x 40 x 36.5 mm (3.7 x 1.6 x 1.4")- Weight 82 g (2.9 oz)- Housing material polycarbonate, glass- Mounting In the wall, in the control box- Weather protection IP55
 UACC-G2Hardware- Network interface (1) 10/100 MbE RJ45 port- Connectivity BLE 4.1- Power supply method PoE- Supported voltage range 48V DC- Maximum power consumption 5W- ESD/EMP protection air: ±15kV, contact: ±8kV- Sensors Proximity sensor- Speaker (1) 8 Ohm, 0.7W- LEDs R/G/B/W- Button (1) factory reset- NFC frequency 13.56 MHz- NFC read range < 30 mm- NFC standards ISO 14443A, 14443B, 15693- NFC technology NFC Tag 1,2,3,4,5; MIFARE Classic; MIFAREPlus; MIFARE Ultralight; MIFARE DESFire- Operating temperature -30 to 45° C (-22 to 113° F)- Operating humidity 5 to 90% non-condensing- Certifications CE, FCC, IC
 UACC-CardMechanical- Dimensions 85.6 x 54 x 0.8 mm (3.4 x 2.1 x 0.03")- Weight 5 g (0.18 oz)- Format ISO 7810 ID-1- NFC frequency 13.56 MHz- NFC technology ISO/IEC 14443 Type A- MIFARE DESFire- UniFi Access Proprietary Security Protocol
 Scope of delivery- (1) Elevator Hub- (1) G2 Reader- (2) 2-wire PoE Extender- (10) Access Cards

Specifications

Scan this QR code to
 view the product
 All details, up-to-date
 prices and availability

