


Item no.: 389298

EFV2N - 2-way EasyF distributor 5-2400 MHz VD: 5 dB, DC A-E

from **28,52 EUR**

Item no.: 389298
shipping weight: 0.30 kg
Manufacturer: Teledes

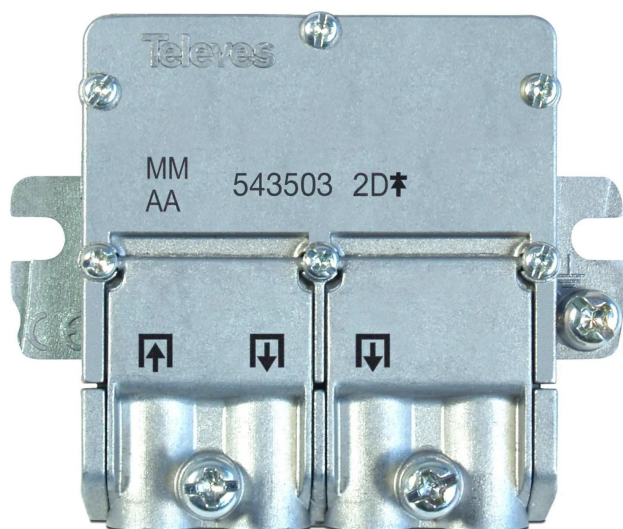

Product Description

2-way distributor and EasyF connection technology for SMATV signals. Thanks to its innovative ultra-small size, it can be installed almost anywhere, even in small distribution boxes. The miniaturisation also applies to the electronics, resulting in improved electrical behaviour and reduced impulse noise. Designed for indoor installation, the distributor can also be used outdoors with a housing (Ref. 417801). Highlights - EasyF connection system: quick and easy installation - Cast housing with good shielding properties - Outstanding reliability: automated production with the latest generation of micro-components Features - Improved attenuation losses - Excellent electrical behaviour: Noise reduction - Earthing screw included - DC pass-through from the outputs to the inputs Good to know EasyF connection system: simple and fast EasyF is an innovative connection concept in which the inner conductor of the coaxial cable is inserted directly into the device, improving connection reliability. Without the F connectors, the chassis can be reduced and the connection of two cables can be secured with a single screw. - Time saving: Quick installation is possible as a connector does not have to be fitted to the coaxial cable first. In addition, the connectors do not need to be screwed to the device, which is sometimes difficult when space is limited. - Connection reliability: The clamp that holds the cables prevents the coaxial cable from coming loose. - Cost savings: No additional connections required (neither F nor IEC). - Space optimisation: inputs and outputs are always on the same side of the device to prevent the coaxial cables from bending and to make it easier to work in cabinets and registration boxes. - Very simple three-step assembly: to connect the two cables, simply unscrew the front plates and screw them back on: 1. Unscrew the front plate of the distributor to access the connection. 2. Insert the previously stripped coaxial cables. 3. Close the front panel and screw it tight to ensure the connection. Learn more about the reliability of EasyF connection technology With EasyF connections, the connection between the coaxial cable and the device is made using an automated system for contacting the inner conductor without additional solder joints. - Always like new: The service life of the device increases when the portion of solder that wears out over time is removed. - Failure rates, which are usually caused by cold solder joints, are thus reduced. - Electromagnetic behaviour optimisation: for high frequencies. - Our commitment to the environment is reinforced: No environmental pollution from welding and reduced power consumption during production.

Specifications

Scan this QR code to
view the product

All details, up-to-date
prices and availability

