


Item no.: 389551

UD2410ST - Feed-through socket in plug-in technology AD: 10 dB

from **17,84 EUR**

Item no.: 389551
shipping weight: 0.10 kg
Manufacturer: Televes

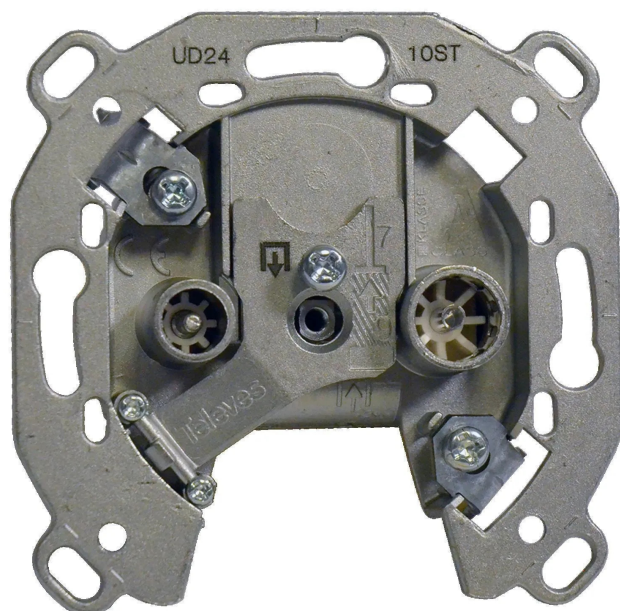

Product Description

Feed-through socket 2 connections UWK/TV-SAT2-way feed-through socket with plug-in technology. IEC plug for VHF (radio) and DVB-T/T2 and IEC socket for DVB-S/S2 (SAT)DC outlet (IEC socket/F connection) and suitable for return channel. Very small housing.Socket design: With terminals and open bottom frameHighlights- Robot-controlled automated production- Very good shielding properties- Excellent decoupling between the outputsFeatures- Die-cast housing- DC pass-through from SAT connection to input and bidirectional circulation between input and output with DC voltage bypass- Compatible with coaxial cables with sheath diameters ranging from 5 to 6.9 mm (Ø 5...6.9 mm)Technical specifications- Item no. UD2410ST- Mounting - ##- Number of connections - 2- R/TV plug - "IEC" plug- SAT plug - "IEC" coupling- Pass-through - Yes- Frequency band - TV- Frequency range - MHz 5 ... 862- Decoupling - dB > 25- Through attenuation - dB 3.5- Attenuation: R/TV connector - dB 8.5- Attenuation: SAT connector - dB --- Frequency band - SAT- Frequency range - MHz 950 ... 2400- Decoupling - dB > 20- Feed-through attenuation - dB 5- Attenuation: R/TV connector - dB --- Attenuation: SAT connector - dB 10- DC passband - SAT?On / Off ?On- Max. Current consumption - mA 350Physical data- Net weight: 96g- Gross weight: 96g- Width: 70mm- Height: 70mm- Depth: 27mm- Main product weight: 96g

Specifications

Scan this QR code to
view the product
All details, up-to-date
prices and availability

