


Item no.: 389553

UD2420ST - Feed-through socket in plug-in technology AD: 20 dB

from **17,84 EUR**

Item no.: 389553
shipping weight: 0.10 kg
Manufacturer: Televes

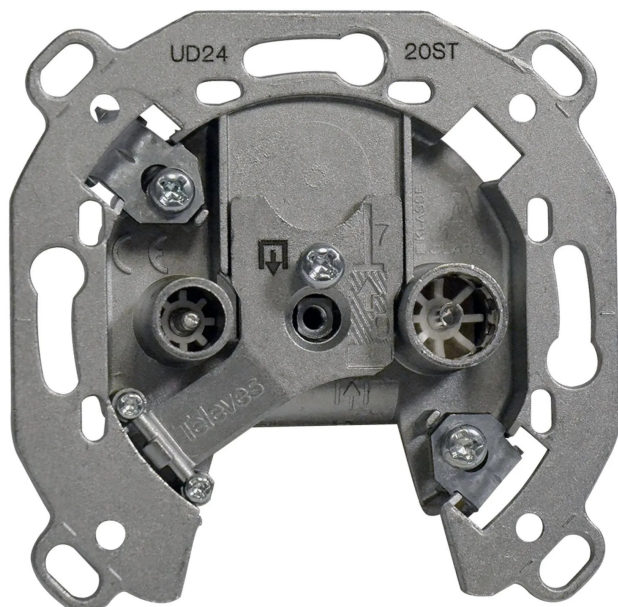

Product Description

2-way feed-through socket with plug-in technology. IEC plug for FM (radio) and DVB-T/T2 and IEC socket for DVB-S/S2 (SAT)DC feed-through (IEC socket/F connection) and suitable for return channel. Very small housing.Highlights- Robot-controlled automated production- Very good shielding properties- Excellent decoupling between the outputsFeatures- Die-cast housing- DC pass-through from SAT connection to input and bidirectional circulation between input and output with DC voltage bypass- Compatible with coaxial cables with sheath diameters ranging from 5 to 6.9 mm (Ø 5...6.9 mm)Technical dataMounting - ##Number of connections- 2R/TV plug- "IEC" plugSAT plug - "IEC" couplingFeed-through- YesFrequency range TV - MHz 5 ... 862Decoupling TV- dB > 10Feed-through attenuation TV - dB 0.6Attenuation TV: - R/TV connector dB 20Attenuation TV: - SAT connector dB --Frequency range SAT- MHz 950 ... 2400Decoupling SAT- dB > 18Feed-through attenuation SAT - dB 1.2Attenuation SAT: R/TV connector - dB --Attenuation SAT: SAT connector - dB 24DC pass-through - SAT?On/Off.?On.Max. Current consumption- mA 350Physical dataNet weight:- 93gGross weight:- 93gWidth:- 70mmHeight:- 67mmDepth:- 27mmMain product weight:- 93g

Specifications

Scan this QR code to
view the product
All details, up-to-date
prices and availability

