


Item no.: 395755

PR3P2US3 - US power supply, 24W

from **10,11 EUR**

Item no.: 395755
shipping weight: 0.10 kg
Manufacturer: Teltonika

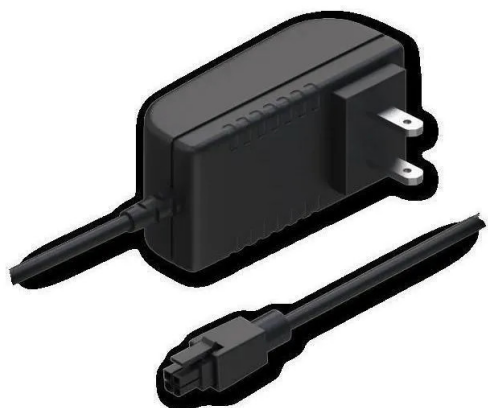

Product Description

US POWER SUPPLY, 24W
TECHNICAL DATA
GENERAL
Input voltage- 100 – 240 VAC
Input frequency- 50 / 60 Hz
Input current- 0.6 A
Input connector- US (Type A)
Output voltage- 12 VDC
Output current- 2.0 A
Output connector- 4-pin, 3 mm pitch
ADDITIONAL
Input voltage range- 90 – 264 VAC
Input frequency range- 47 – 63 Hz
Maximum input inrush current- 40 A
Output voltage maximum deviation- 11.4 – 12.6 VDC
Short circuit protection- Yes
HIPOT (dielectric withstand test)- Primary to Secondary: 3000 VAC
MTBF- 50000 h
Certification- 47 CFR FCC part 15 subpart B, 10-1-2016, ANSI C63.4:2014, IEC 62321-7-1:2015, IEC 62321-6:2015, IEC 62321-5:2013, IEC 62321-4:2013, IEC 62321:2008 Annex C, UL 60950-1, CSA C22.2 No 60950-1-03

Specifications

Scan this QR code to
view the product
All details, up-to-date
prices and availability

