


Item no.: 395755

PR3P2US3 - US power supply unit, 24 W

from **10,51 EUR**

Item no.: 395755
shipping weight: 0.10 kg
Manufacturer: Teltonika

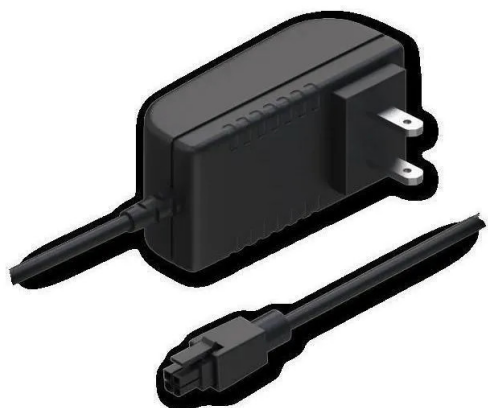

Product Description

US POWER SUPPLY, 24 W TECHNICAL DATA GENERAL- Input voltage: 100 - 240 VAC- Input frequency: 50 / 60 Hz- Input current: 0.6 A- Input connector: US (type A)- Output voltage: 12 VDC- Output current: 2.0 A- Output connector: 4-pin, 3 mm pitch ADDITIONAL- Input voltage range: 90 - 264 VAC- Input frequency range: 47 - 63 Hz- Maximum input inrush current: 40 A- Maximum output voltage deviation: 11.4 - 12.6 VDC- Short-circuit protection: Yes- HIPOT (dielectric resistance test): Primary to secondary: 3000 VAC- MTBF: 50000 h- Certification: 47 CFR FCC part 15 subpart B, 10-1-2016, ANSI C63.4:2014, IEC 62321-7-1:2015, IEC 62321-6:2015, IEC 62321-5:2013, IEC 62321-4:2013, IEC 62321:2008 Annex C, UL 60950-1, CSA C22.2 No 60950-1-03

Specifications

Scan this QR code to
view the product

All details, up-to-date
prices and availability

