


Item no.: UC-C6-CMR_METER

UC-C6-CMR - Patchcable Cat.6, U/UTP, 1m, black

0,42 EUR

Item no.: UC-C6-CMR_METER
shipping weight: 0.10 kg
Manufacturer: Ubiquiti

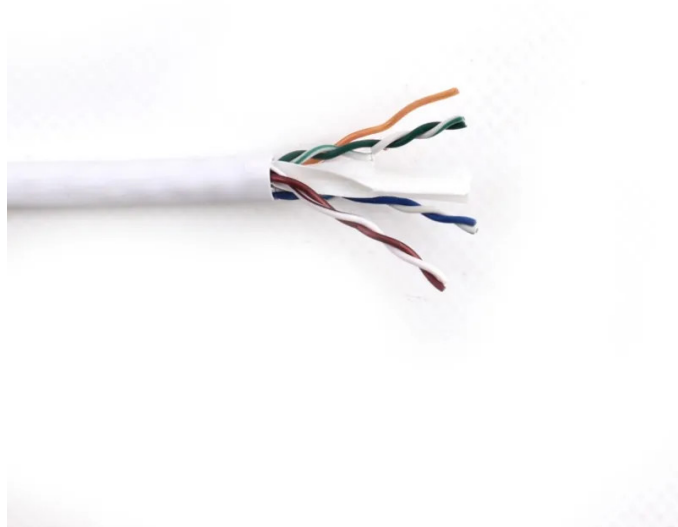

Product Description

U-Cable-C6-CMR - UniFi cable Cat. 6 CMR rating, 1 mThe U-Cable-C6-CMR is a Category 6 UTP cable that supports speeds of up to 1 Gbit/s with its 23 AWG solid copper twisted pair conductor. The small diameter of the conductor in combination with the cable's anti-crosstalk divider isolates and protects signals from interference. The U-Cable-C6 is also a CMR cable with a fire-resistant jacket that ensures safe operation across multiple floors and vertical shafts. Category 6 Ethernet connectors are recommended to accommodate the size of the conductor and optimise its performance. Features:- Category 6 Unshielded Twisted Pair (UTP) cable- Multi-purpose communication cable, riser (CMR) rated, fire resistant jacket- 1 m- 23 AWG solid copper, twisted pair conductor- Anti-Crosstalk Divider- For 1000BASE-T Ethernet applications- Cable length: 1 m- Cable colour: White- Cable type: Category 6- Shielding type: UTP- Flame rating: CMR- Conductor gauge: 23 AWG- Conductor type: Solid bare copper- Jacket material: PVC- Jacket diameter: 6.0 +/- 0.2 mm- Bend radius: min. 24 mm- Tensile stress: max. 110 N- Storage temperature: -20°C to 75°C (-4°F to 167°F)- Installation temperature: 0°C to 60°C (32°F to 140°F)- Operating temperature: -20°C to 60°C (-4°F to 60°F)- Anti-crosstalk divider: Yes- Pull cord: Yes- Data rate: 10/100/1000 Base-T- Reference bandwidth: Up to 600 MHz- Standards: Electrical transmission: ANSI/TIA-568-C.2 (2009), ISO/IEC 11801 (Edition 2.2), IEC 61156-5 (Edition 2.1); Flame test: UL 1666 (CMR); Material and construction: UL 444, CSA 22.2 NO.214, EU Directive 2011/65/EU (RoHS2), EU Directive 2006/95/EC (LVD)

Specifications

Scan this QR code to
view the product
All details, up-to-date
prices and availability

