


Item no.: 402308

90760 - PCI Express x1 network card 2.5 Gigabit LAN 1 x M12 PoE

from **154,19 EUR**

Item no.: 402308
 shipping weight: 0.10 kg
 Manufacturer: Delock

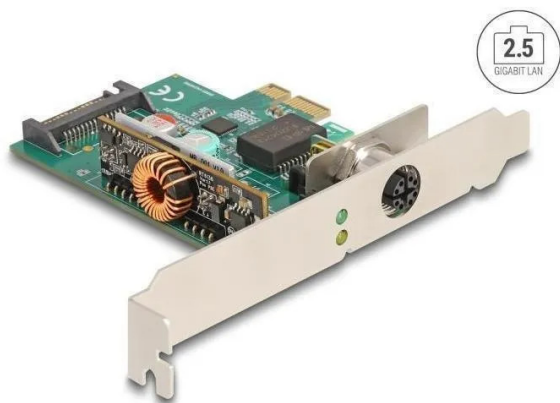

Product Description

The PCI Express card by Delock offers a network connection with a transmission rate of up to 2500 Mbps. This industrial Ethernet adapter by Delock can be used to connect various components with M12 connectors, e.g. for machine control or automation. NBASE-T for higher speeds. Modern services and new technologies require higher bandwidths. NBASE-T technology enables speeds of 1 Gbps and 2.5 Gbps with conventional network cables. The best possible transmission rate is set automatically. PoE support. The M12 port supports Power over Ethernet in accordance with IEEE 802.3af / 802.3at; this allows PoE-capable devices, such as IP cameras or PoE splitters, to be supplied with power via the network cable. Technical data- Connections: external: 1 x M12 socket 8 pin X-coded internal: 1 x PCI Express x1, V2.11 x SATA 15 pin power connector- Chipset: Realtek RTL8125B- Data transfer rates: Ethernet up to 10 Mbps (half/full duplex) Fast Ethernet up to 100 Mbps (half/full duplex) Gigabit Ethernet up to 1000 Mbps (half/full duplex) NBASE-T with up to 2.5 Gbps (half/full duplex) PCI Express x1 up to 4 Gbps- Compatible with IEEE 802.3, IEEE 802.3u, IEEE 802.3ab- Supports Wake On LAN (WOL)- Supports IEEE 802.1P Layer 2 Priority Encoding- Supports IEEE 802.3x Full Duplex flow control- Supports IEEE 802.1Q Virtual LAN (VLAN)- Supports 16k Jumbo Frames- Supports PXE- Supports IEEE 802.3af PoE- Supports IEEE 802.3at PoE+- Output power: max. 30 W total- LED display for connection and activity System requirements- Windows 10/10-64/11- PC with a free PCI Express slot Package contents- PCI Express card- Low Profile cover- Operating instructions Packaging- Retail box

Specifications

Scan this QR code to
 view the product

All details, up-to-date
 prices and availability

