


Item no.: 389876

OSK40SCPC - Optical cable Dca 0.4m plug SCAPC-SCUPC

from **13,46 EUR**

Item no.: 389876
 shipping weight: 0.10 kg
 Manufacturer: Televes

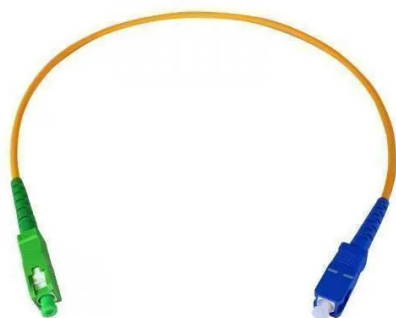

Product Description

Single-mode (SM) fibre optic patch cable with SC/APC connector at one end and SC/UPC at the other end. Highlights- Low attenuation- Includes aramid fibres to reinforce the structure- EU fire protection class Dca-s2,d2,a1- Fibre type:ITU-T G.657.A2- LSFH jacket, colour orange- Optical SC connectors for end face design with rounded fibre end (UPC) on one side and additionally angled end face (APC) on the other side- 0.4m long Technical data Euroclass- Dca Euroclass: Smoke emission - s2 Euroclass: Dripping of particles - d2 Euroclass: Acidity - a1 Fibre types - Monomode (ITU-T-G.657A2)## - OS1 Fibre core diameter - ?m 9 Fibre cladding diameter - ?m 125 Cladding diameter on fibre- ?m 250 Cable structure- fixed core Fibre structure diameter- mm 0,85 Outer sheath diameter- mm 3 Outer sheath material- LSFH Protective gel- No Attenuation 1310nm - dB/km < 0.8 Attenuation 1490nm - dB/km < 0.8 Attenuation 1550nm - dB/km < 0.8 Insertion loss connection 1- dB < 0.5 Insertion loss connection 2- dB < 0.5 Return loss connection 1 - dB > 60 Return loss connection 2- dB > 50 Optical port 1 type - SC Ground joint type (Optical port 1) - APC Optical port 2 type - SC Ground joint type (Optical port 2) - UPC Short pull- N 450 Long pull - N 200 Strength increase element N 200 Strength increase element- Aramid fibres Short break (@100mm) - N 500 Long break (@100mm) - N 100 Minimum propagation speed - mm 150 Operating temperature- °C -20 ... 70 Physical data Net weight:- 9g Gross weight:- 9g

Specifications

Scan this QR code to
 view the product
 All details, up-to-date
 prices and availability

