


Item no.: 391313

XV2-22H0A00-EU - XV2-22H Wi-Fi 6 Indoor AP (EU)

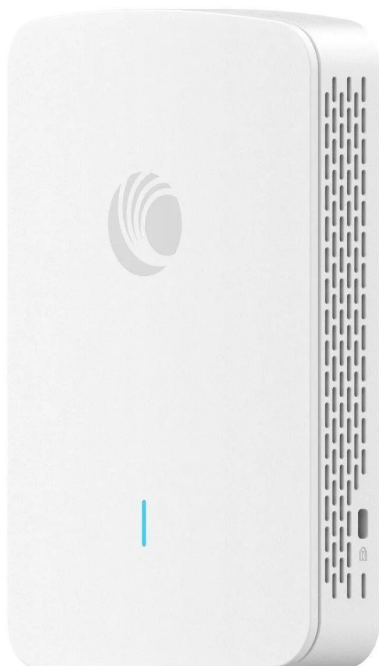

from **491,62 EUR**

Item no.: 391313
 shipping weight: 0.60 kg
 Manufacturer: Cambium Networks

Product Description

The XV2-22H Wi-Fi 6 AP for indoor use offers a bandwidth of 2.97 Gbps and an integrated switch. Ideal for hospitality, MDU, education and small and medium business applications. Cambium Networks Wi-Fi 6 wall plate access points (AP) provide personal Wi-Fi in the space where people and devices connect. Designed for discreet installation on a flat wall surface or above a junction box. Free online tool to design your Cambium Wi-Fi network Link to Wi-Fi Designer. Key features- Wall plate 802.11ax, 2x2- 3 x GbE Ethernet, one with PoE output- Electrical RJ45 through-connections- IoT-capable - BLE/Zigbee/Thread/Matter Wireless functions- Radio frequency: 2.4 + 5 GHz (dual band)- WLAN standards: 802.11ax, 802.11ac, 802.11n, 802.11a, 802.11b/g- Hotspot 2.0: Yes- Transmission speed - 5 GHz [Mbit/s]: 2402- Transmission speed - 2.4 GHz [Mbit/s]: 574- Transmission power 2.4 GHz [dBm]: 30- Transmission power 5 GHz [dBm]: 28- 2.4 GHz MIMO: 2 x 2- 5GHz MIMO: 2 x 2- Antenna type: Built-in- Antenna gain [dBi]: 5 Connectors and interfaces- LAN speed: (3) 10/100/1000 Mbit/s- Gigabit LAN: Yes Power- Power over Ethernet: 802.3af, 802.3at- PoE type: PoE-Out + PoE-In- Max. Power consumption [W]: 10- Physical characteristics- Purpose: Indoor- Operating temperature [°C]: 0 to 40- Weight [g]: 417- Width [mm]: 105- Height [mm]: 160- Depth [mm]: 32 Software- Operating mode: Access point- Management: Web management, Cambium cnMaestro Cloud- IPv6 support: Yes- Default IP address: 192.168.0.1, dynamic from DHCP- Default login and password: admin / admin

Specifications

Scan this QR code to
 view the product

All details, up-to-date
 prices and availability

