


Item no.: U-CABLE-C6-CMP\_METER

## U-CABLE-C6-CMP - UniFi cable Cat. 6 CMP rating, 1 m

**0,94 EUR**

Item no.: U-CABLE-C6-CMP\_METER  
shipping weight: 0.10 kg  
Manufacturer: Ubiquiti

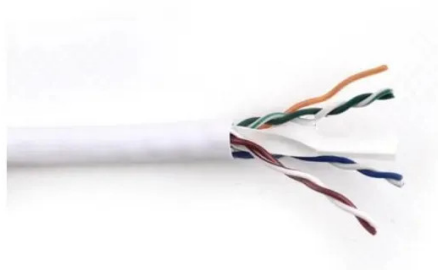

### Product Description

Category 6 Ethernet cable for high-speed applications in environments requiring plenum-rated cabling.- Category 6 UTP multi-purpose cable Category 6 UTP multi-purpose communication cable- Plenum (CMP)-classified, fire-resistant jacket- Anti-crosstalk divider- Cable length 1 mMechanical- Box dimensions 474 x 346 x 458 mm (18.7 x 13.6 x 18")- Box weight 14.8 kg (32.5 lb)- Cable length 1 m (1000 ft)- Cable colour White- Cable type Category 6- Shielding type UTP- Flame retardant CMP- Conductor cross-section 23 AWG- Conductor type Solid copper- Jacket material Low smoke flame retardant PVC- Jacket diameter  $5.6 \pm 0.2$  mm- Bending radius Min. 22.4 mm- Tensile stress Max. 110 N- Storage temperature -20 to 75°C (-4 to 167°F)- Installation temperature 0 to 60°C (32 to 140°F)- Operating ambient temperature -20 to 60°C (-4 to 140°F)- Anti-crosstalk divider Yes- Ripcord Yes- Data rate 10/100/1000 Base-T- Reference bandwidth Up to 600 MHz- StandardsElectrical transmission:ANSI/TIA-568-C.2 (2009)ISO/IEC 11801 (Edition 2.2)IEC 61156-5 (Edition 2.1)Flame test: NFPA 262 (CMP)Material and construction:UL 444CSA 22.2 NO.214EU Directive 2011/65/EU (RoHS2)EU Directive 2006/95/EC (LVD)

### Specifications

Scan this QR code to  
view the product

All details, up-to-date  
prices and availability

